

DSE 01


🇬🇧 **Sleeve anchor with hex head screw 8.8 grade and large series washer, zinc plated, ETA-CE Opt.7 certified**

🇫🇷 Cheville à douille zinguée avec vis tête hexagonale classe 8.8, certification ATE-CE Option 7

🇩🇪 Verzinkter Hülseanker mit Sechskantschraube Klasse 8.8, mit ETA-CE Zulassung Option 7

🇪🇸 Anclaje plancha envuelta de acero cincado, montado con tornillo cabeza hexagonal clase 8.8, Homologado ETA-CE Opción 7

🇷🇺 Стальной оцинкованный анкер с болтом с шестигранной головкой класса 8.8, с сертификатом ETA-CE опция 7

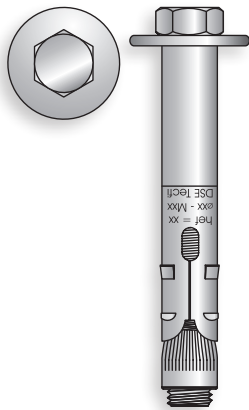

European Technical Approval
OPTION 7 for non-cracked concrete
 ETAG 001 - **PART 1 and 2**
 DoP available on www.tecfi.it/DoP



Item code	Anchor size $\varnothing \times L_a / t_{fix} (mm)$	Screw size M	Pcs. per box	Pcs. per carton
Ø 8 - M6 - AF 10				
★ DSE 01 08 060	8 x 60 / 5	M6	100	1.000
★ DSE 01 08 080	8 x 80 / 25	M6	100	500
★ DSE 01 08 100	8 x 100 / 45	M6	100	500
★ DSE 01 08 120	8 x 120 / 65	M6	50	500
Ø 10 - M8 - AF 13				
★ DSE 01 10 080	10 x 80 / 10	M8	50	250
★ DSE 01 10 100	10 x 100 / 30	M8	50	250
★ DSE 01 10 120	10 x 120 / 50	M8	50	250
★ DSE 01 10 140	10 x 140 / 70	M8	50	250
Ø 12 - M10 - AF 17				
★ DSE 01 12 080	12 x 80 / 10	M10	50	250
★ DSE 01 12 100	12 x 100 / 30	M10	25	250
★ DSE 01 12 120	12 x 120 / 50	M10	25	125
★ DSE 01 12 150	12 x 150 / 80	M10	25	125
Ø 14 - M10 - AF 17				
★ DSE 01 14 085	14 x 85 / 5	M10	25	250
★ DSE 01 14 100	14 x 100 / 20	M10	25	125
★ DSE 01 14 120	14 x 120 / 40	M10	25	125
★ DSE 01 14 150	14 x 150 / 70	M10	25	125
Ø 16 - M12 - AF 19				
★ DSE 01 16 110	16 x 110 / 10	M12	20	100
★ DSE 01 16 130	16 x 130 / 30	M12	15	75
★ DSE 01 16 150	16 x 150 / 50	M12	15	75

★ **ETA-CE Option 7 Certified item** / Agrément technique européen ATE-CE / ETA-CE Zulassung
 Homologación ETA-CE / Сертификация ETA-CE

Usage / Utilisation / Benutzung / Uso / Применение



For through (in-place) heavy duty fixings in non-cracked concrete.


Item included in **TADS - Tecfi Anchor Design Software** for computer aided design of Anchorage.

DoP



Declaration of Performance

Installation sequence / Instructions de mise en oeuvre / Setzanweisung / Secuencia de instalación / Порядок монтажа

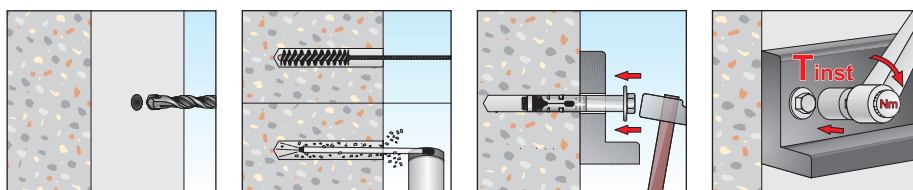

Box / Boîte / Verpackung / Caja / Упаковка



Related products

112

HXE-CONCRETO® HWH concrete screw



HXE01
p. 112

High performance steel anchor



HVE01
p. 106

A2 (AISI 304) S/S sleeve anchor



LZ51
p. 119

SDS-PLUS masonry drill



EO
p. 398

Pump for hole cleaning



DW
p. 164

DSE 11


🇬🇧 **Sleeve anchor with stud 8.8 grade and large series washer, zinc plated, ETA-CE Opt.7 certified**

🇫🇷 Cheville à douille zinguée avec tige filetée classe 8.8, écrou et rondelle, certification ATE-CE Option 7

🇩🇪 Verzinkter Hülseanker mit Gewindestange Klasse 8.8, Schraubenmutter und Scheibe, mit ETA-CE Zulassung Option 7

🇪🇸 Anclaje plancha envuelta de acero cincado, montado con espárrago clase 8.8, tuerca hexagonal y arandela, Homologado ETA-CE Opción 7

🇷🇺 Стальной оцинкованный анкер с резьбовым стержнем класса 8.8, с сертификатом ETA-CE опция 7

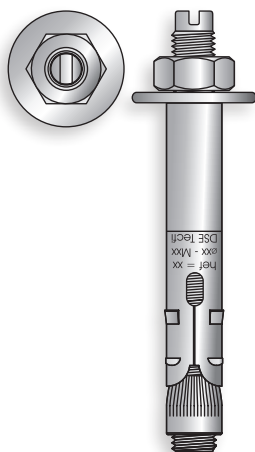

Item code	Anchor size $\varnothing \times L_a / t_{fix} (mm)$	Stud size M	Pcs. per box	Pcs. per carton
Ø 8 - M6 - AF 10				
★ DSE 11 08 080	8 x 80 / 25	M6	100	500
Ø 10 - M8 - AF 13				
★ DSE 11 10 080	10 x 80 / 10	M8	50	250
★ DSE 11 10 100	10 x 100 / 30	M8	50	250
★ DSE 11 10 120	10 x 120 / 50	M8	25	250
★ DSE 11 10 140	10 x 140 / 70	M8	25	250
Ø 12 - M10 - AF 17				
★ DSE 11 12 100	12 x 100 / 30	M10	25	125
★ DSE 11 12 120	12 x 120 / 50	M10	25	125
★ DSE 11 12 150	12 x 150 / 80	M10	25	125
Ø 14 - M10 - AF 17				
★ DSE 11 14 100	14 x 100 / 20	M10	25	125
★ DSE 11 14 120	14 x 120 / 40	M10	25	125
Ø 16 - M12 - AF 19				
*DSE 11 16 130	16 x 130 / 30	M12	15	75
*DSE 11 16 150	16 x 150 / 50	M12	15	75

★ ETA-CE Option 7 Certified item / Agrément technique européen ATE-CE / ETA-CE Zulassung
Homologación ETA-CE / Сертификация ETA-CE

* Item without ETA-CE Certification / Article sans certification / Artikel ohne Zulassung / Artículo no homologado ETA-CE
/ Артикул без сертификата ETA-CE



European Technical Approval
OPTION 7 for non-cracked concrete
ETAG 001 - PART 1 and 2
DoP available on www.tecfi.it/DoP



Usage / Utilisation / Benutzung / Uso / Применение



For through (in-place) heavy duty fixings in non-cracked concrete.


Item included in TADS - Tecfi Anchor Design Software for computer aided design of Anchorage.

DoP



Dichiarazione di Prestazione



Installation sequence / Instructions de mise en oeuvre / Setzanweisung / Secuencia de instalación / Порядок монтажа

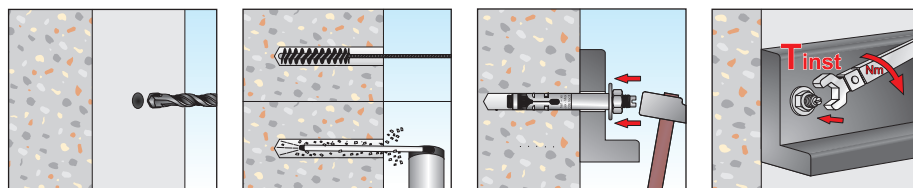

Box / Boîte / Verpackung / Caja / Упаковка



Related products



DSE 07


🇬🇧 Sleeve anchor with flat CSK head socket recess screw 8.8 grade, zinc plated, ETA-CE Opt.7 certified

🇫🇷 Cheville à douille zinguée avec vis tête fraisée plate à six pans creux classe 8.8, certification ATE-CE Option 7

🇩🇪 Verzinkter Hülseanker mit Innensechskant- Senkkopfschraube Klasse 8.8, mit ETA-CE Zulassung Option 7

🇪🇸 Anclaje plancha envuelta de acero cincado, montado con tornillo cabeza avellanada con hueco hexagonal clase 8.8, Homologado ETA-CE Opción 7

🇷🇺 Стальной оцинкованный анкер с болтом с плоской потайной головкой с внутренним шестигранником класса 8.8, с сертификатом ETA-CE опция 7

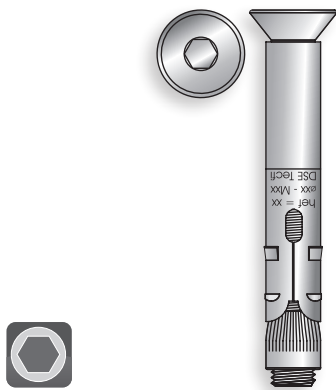

European Technical Approval
OPTION 7 for non-cracked concrete
ETAG 001 - PART 1 and 2
DoP available on www.tecfi.it/DoP



Item code	Anchor size $\varnothing \times L_a / t_{fix}$ (mm)	Screw size M	Pcs. per box	Pcs. per carton
Ø 8 - M6 - In-hex 4				
*DSE 07 08 045	8 x 45 / 5	M6	100	1.000
*DSE 07 08 060	8 x 60 / 5	M6	100	1.000
*DSE 07 08 080	8 x 80 / 25	M6	100	500
*DSE 07 08 100	8 x 100 / 45	M6	100	500
*DSE 07 08 120	8 x 120 / 65	M6	50	500
Ø 10 - M8 - In-hex 5				
*DSE 07 10 065	10 x 65 / 15	M8	100	500
★ DSE 07 10 085	10 x 85 / 15	M8	50	500
★ DSE 07 10 105	10 x 105 / 35	M8	50	250
★ DSE 07 10 125	10 x 125 / 55	M8	50	250
Ø 12 - M10 - In-hex 6				
*DSE 07 12 070	12 x 70 / 20	M10	50	250
★ DSE 07 12 080	12 x 80 / 10	M10	50	250
★ DSE 07 12 110	12 x 110 / 40	M10	25	250
★ DSE 07 12 130	12 x 130 / 60	M10	25	250
Ø 14 - M10 - In-hex 6				
*DSE 07 14 075	14 x 75 / 15	M10	25	250
★ DSE 07 14 105	14 x 105 / 25	M10	20	200
★ DSE 07 14 125	14 x 125 / 45	M10	20	200
Ø 16 - M12 - In-hex 8				
*DSE 07 16 080	16 x 80 / 20	M12	20	200
*DSE 07 16 115	16 x 115 / 15	M12	20	100
*DSE 07 16 135	16 x 135 / 35	M12	15	75

★ **ETA-CE Option 7 Certified item** / Agrément technique européen ATE-CE / ETA-CE Zulassung
Homologación ETA-CE / Сертификация ETA-CE

* **Item without ETA-CE Certification** / Article sans certification / Artikel ohne Zulassung / Artículo no homologado ETA-CE
/ Артикул без сертификата ETA-CE

Usage / Utilisation / Benutzung / Uso / Применение




For through (in-place) heavy duty fixings in non-cracked concrete.

Item included in TADS - Tecfi Anchor Design Software for computer aided design of Anchorage.

Box / Boîte / Verpackung / Caja / Упаковка



Installation sequence / Instructions de mise en oeuvre / Setzanweisung / Secuencia de instalación / Порядок монтажа

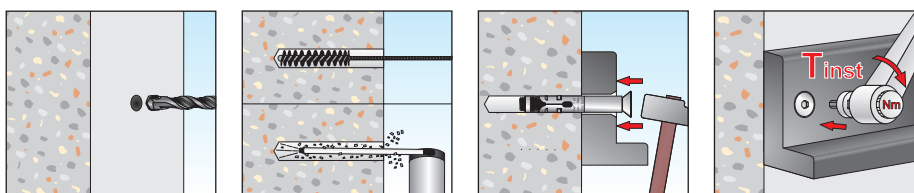

DoP



Declaration of Performance

Related products

114

HXE-CONCRETO® flat CSK head screw



HXE03
p. 102

High performance steel anchor



HVE03
p. 108

In-hex power bit



FN
p. 401

SDS-PLUS masonry drill



EO
p. 398

Pump for hole cleaning



DW
p. 164

DSE 10


🇬🇧 **Sleeve anchor with mushroom head screw 8.8 grade (anti-theft with special cap to be hammered), zinc plated, ETA-CE Opt.7 certified**

🇫🇷 Cheville à douille zinguée avec vis tête ronde classe 8.8 (avec cache-tête inamovible, à marteler), certification ATE-CE Option 7

🇩🇪 Verzinkter Hülseanker mit Rundkopfschraube Klasse 8.8, (Innensechsrund- Schutzkappe zu hämmern), mit ETA-CE Zulassung Option 7

🇪🇸 Anclaje plancha envuelta de acero cincado, montado con tornillo cabeza abombada 6 lóbulos internos clase 8.8 (con tapón para la inviolabilidad), Homologado ETA-CE Opción 7

🇷🇺 Стальной оцинкованный анкер с низкой полукруглой головкой класса 8.8 (возможность использования ударного колпачка-заглушки), с сертификатом ETA-CE опция 7

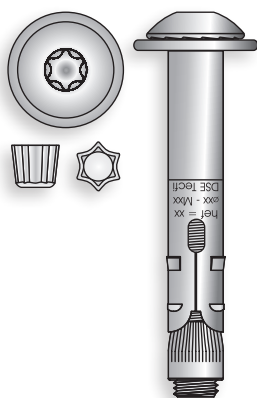

T-40

Item code	Anchor size $\varnothing \times L_a / t_{fix}$ (mm)	Screw size M	Pcs. per box	Pcs. per carton	Prezzo Euro / 100 pz.
Ø 10 - M8 - T-40					
*DSE 10 10 060	10 x 60 / 10	M8	100	500	
DSE 10 10 080	10 x 80 / 10	M8	50	250	
DSE 10 10 100	10 x 100 / 30	M8	50	250	
DSE 10 10 120	10 x 120 / 50	M8	50	250	
Ø 12 - M10 - T-40					
*DSE 10 12 060	12 x 60 / 10	M10	50	250	
DSE 10 12 080	12 x 80 / 10	M10	50	250	
DSE 10 12 100	12 x 100 / 30	M10	25	250	
DSE 10 12 120	12 x 120 / 50	M10	25	250	
Ø 14 - M10 - T-40					
DSE 10 14 085	14 x 85 / 5	M10	25	250	
DSE 10 14 100	14 x 100 / 20	M10	25	125	
DSE 10 14 120	14 x 120 / 40	M10	25	125	

★ **ETA-CE Option 7 Certified item** / Agrément technique européen ATE-CE / ETA-CE Zulassung
Homologación ETA-CE / Сертификация ETA-CE

* **Item without ETA-CE Certification** / Article sans certification / Artikel ohne Zulassung / Artículo no homologado ETA-CE
/ Артикул без сертификата ETA-CE



European Technical Approval
OPTION 7 for non-cracked concrete
ETAG 001 - PART 1 and 2
DoP available on www.tecfix.it/DoP

Usage / Utilisation / Benutzung / Uso / Применение




For through (in-place) heavy duty fixings in non-cracked concrete.

Item included in TADS - Tecfi Anchor Design Software for computer aided design of Anchorage.

Box / Boîte / Verpackung / Caja / Упаковка



Installation sequence / Instructions de mise en oeuvre / Setzanweisung / Secuencia de instalación / Порядок монтажа

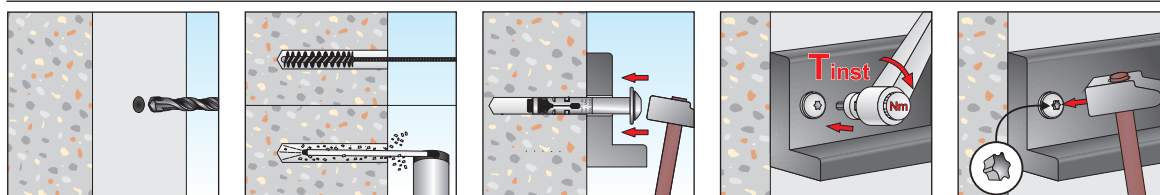

DoP



Declaration of Performance

Related products

CONCRETO® mushroom head screw



HXT
p. 104

Sleeve anchor with nut



DXE04
p. 125

SDS-PLUS masonry drill



EO
p. 398

6-lobe power bit



JB
p. 403

Pump for hole cleaning



DW
p. 164